
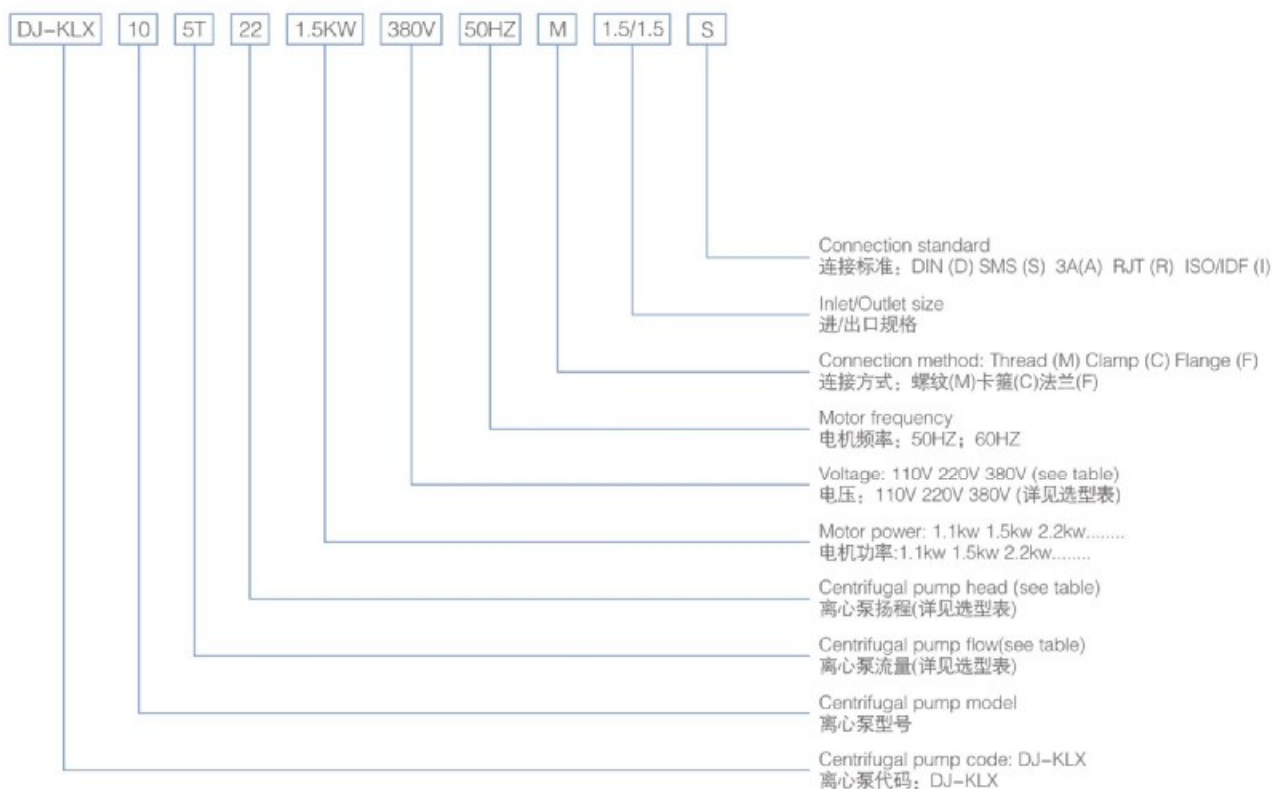


DJ-KLX 离心泵型号说明

DJ-KLX centrifugal pump model instruction

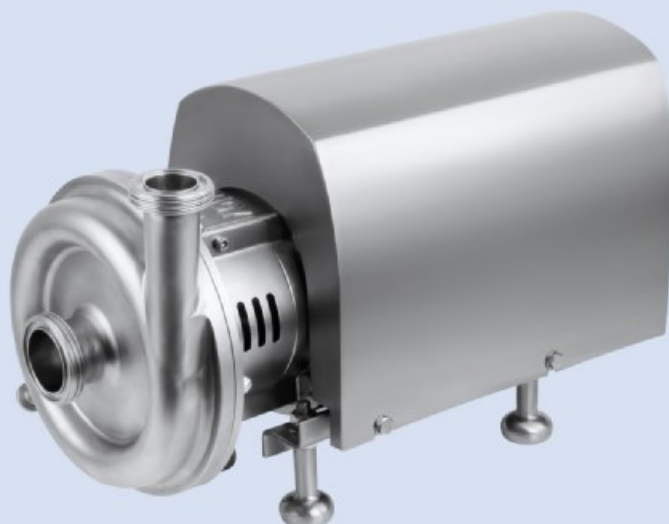

举例 For example:
 DJ-KLX-10-5T-22-1.5KW-380V-50HZ-M-1.5/1.5-S

DJ-KLX 离心泵选型表
DJ-KLX centrifugal pump selection table



型号 Model	功率 Power	流量 Flow rate (m³)	扬程 Head (M)	进口/出口 Inlet&outlet	理论重量 (KG)
DJ-KLX-10	1.1KW	3	22	1.5"/1.5"	30
	1.1KW	5	22		30
	1.5KW	3	22		36
	1.5KW	5	22		36
	1.5KW	8	22		36
	1.5KW	9	22		36
	1.5KW	12	20		36
	1.5KW	15	18		36
	2.2KW	18	16		40
	2.2KW	18	16		40
DJ-KLX-15	1.5KW	3	28	2"/1.5"	39
	1.5KW	5	28		39
	1.5KW	8	26		39
	2.2KW	10	25		42
	2.2KW	15	22		42
	2.2KW	18	18		42
	2.2KW	20	16		42
	3.0KW	20	16		54
	3.0KW	20	16		54
	3.0KW	20	16		54

型号 Model	功率 Power	流量 Flow rate (m³)	扬程 Head (M)	进口/出口 Inlet&outlet	理论重量 (KG)	
DJ-KLX-20-1	2.2KW	5	36	2"/2"	47	
	3.0kw				56	
	3.0kw	10	36		56	
	4.0KW				61	
	4.0KW	15	35		61	
	4.0KW	20	33		61	
	4.0KW	25	30		61	
	5.5KW				83	
	5.5KW	30	30		2.5"/2"	83
	5.5KW	38	22			83
DJ-KLX20-2	5.5KW	20	40	2"/2"	82	
	5.5KW	25	37		82	
	5.5KW	30	36	2.5"/2"	82	
	5.5KW	36	32		82	
	7.5KW	40	30		86	
	7.5KW	45	28		86	
	4.0KW	5	50		2.5"/1.5"	61
5.5KW	10	50	82			
5.5KW	15	48	82			
5.5KW	20	45	82			
DJ-KLX-30	5.5KW	10	60	2.5"/1.5"	83	
	5.5KW	15	55		83	
	5.5KW	20	50		83	
	7.5KW				87	
	7.5KW	25	45		87	
	7.5KW	30	40		87	

注意：以上数据图相关尺寸不作为实物最终依据，东正保留对于数据更新权限不再另行通知。
Note: The relevant dimensions of the above data diagrams are not regarded as the final basis of the actual object. DONJOY reserves the right to update the data without further notice.



型号 Model	功率 Power	流量 Flow rate (m³)	扬程 Head (M)	进口/出口 Inlet&outlet	理论重量 (KG)
DJ-KLX-35-1	11KW	10	70	3"/1.5" 3"-2"	152
	11KW	15	65		152
	11KW	20	65		152
	11KW	25	60		152
	11KW	30	60		152
	11KW	35	55		152
	15KW	40	50		165
	15KW	45	50		165
	15KW	50	45		165
DJ-KLX-35-2	15KW	20	70	3"-2" DN90-2"	165
	15KW	25	70		165
	15KW	30	70		165
	15KW	35	65		165
	15KW	40	65		165
	18.5KW	45	60		174
	18.5KW	50	55		174


型号 Model	功率 Power	流量 Flow rate (m³)	扬程 Head (M)	进口/出口 Inlet&outlet	理论重量 (KG)
DJ-KLX-40-1	11KW	45	42	3"/2.5" 4"-3"	148
	11KW	50	42		148
	15KW	60	40		162
	15KW	65	40		162
	15KW	70	38		162
	15KW	80	35		162
	15KW	90	33		162
	18.5KW	100	30		171
	18.5KW	110	28		171
DJ-KLX-40-2	15KW	50	50	3"/2.5" 4"-3"	162
	15KW	60	48		162
	18.5KW	70	47		171
	18.5KW	80	46		171
	22KW	85	45		205
	22KW	90	44		205
	22KW	100	43		205
	22KW	110	40		205
	22KW	120	35		205
	30KW	130	30		263
	30KW	140	20		263

注意：以上数据图相关尺寸不作为实物最终依据，东正保留对于数据更新权限不再另行通知。

Note: The relevant dimensions of the above data diagrams are not regarded as the final basis of the actual object. DONJOY reserves the right to update the data without further notice.

DJ-KLX 系列离心泵数据图

DJ-KLX series centrifugal pump data chart

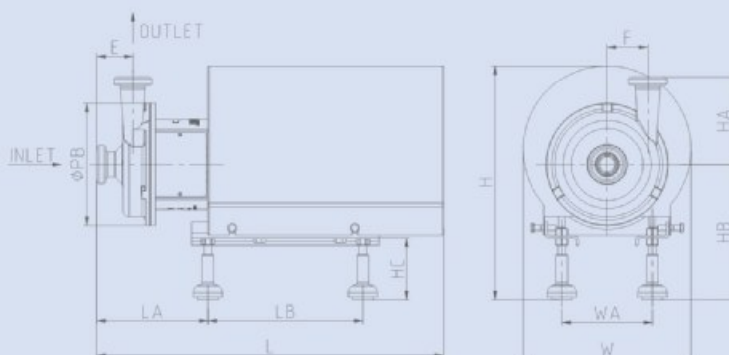


KLX 系列 Series	泵头规格 Pump head dimension				外形安装尺寸 Assembly Dimension							进/出口连接方式 Inlet / outlet connection											
	功率 Power (KW)	进口 Inlet d"/DN	出口 Outlet d"/DN	ΦPB	F	LB	H	HB	HC	W	WA	SMS螺纹连接 Thread connection				INCH卡箍连接 Clamp connection				DIN螺纹连接 Thread connection			
												E	LA	HA	L	E	LA	HA	L	E	LA	HA	L
KLX10	1.1KW	1.5"	1.5"	189	63	240	337	199	94.8	250	125	56	171	136	512	49	163.7	129	504.7	56	171	136	517
	1.5~2.2KW	1.5"	1.5"	189	63	240	359	189		260	140	56	171	136	534	49	163.7	129	526.7	56	171	136	539
KLX15	1.5~2.2KW	2"	1.5"	250	95	240	359	189		260	140	48	171	155	534	41	163.7	148	526.7	49	172	155	535
	3KW	2"	1.5"	250	95	300	413	219		320	160	48	151	155	576	41	143.7	148	568.7	49	152	155	577
KLX20-Ⅰ	2.2KW	2"	2"	250	92	240	362	189		320	140	45	165.5	170	584	38	158.2	163	576.7	46	166.5	171	585
	3KW	2"	2"	250	92	300	416	219		340	160	45	172.5	170	591	38	165	163	574	46	176	171	592
KLX20-Ⅱ	4KW	2"	2"	250	92	300	421.5	211		380	190	45	175	170	594	38	168	163	587	46	176	171	595
	5.5~7.5KW	2"/2.5"	2"	250	92	330	466	231		340	216	45	172	170	591	38	160	163	580	46	170.5	171	590
KLX25 KLX30	4KW	3"	1.5"	328	127.5	300	421.5	211		380	190	60	200.5	194	680	49	189.2	183	668.7	59	199.5	193	679
	5.5~7.5KW	3"	1.5"	328	127.5	330	466	231		380	216	60	200.5	194	680	49	189.2	183	668.7	59	199.5	193	679
KLX35-Ⅰ	11~15KW	3"	1.5"	363	131	450	551	260		470	254	76	239.5	229	815	65	228.2	222	803.2	75	238.5	229	814
	15KW	3"	2"	363	131	450	551	260		470	254	76	239.5	229	815	65	228.2	222	803.2	75	238.5	230	814
KLX35-Ⅱ	18.5KW	3"	2"	363	131	450	551	260		470	254	76	239.5	229	815	65	228.2	222	803.2	75	238.5	230	814
	11~15KW	3"	2.5"	315	105	450	551	260		470	254	73.5	248.5	213.5	823	61.5	237.2	202.5	811.7	73.5	247.5	212.5	822
KLX40-Ⅰ	18.5KW	3"	2.5"	315	105	450	551	260		470	254	73.5	248.5	213.5	823	61.5	237.2	202.5	812	73.5	247.5	212.5	823
	22KW	3"	2.5"	315	105	515	583	281		510	279	73.5	243.5	213.5	919	61.5	232.2	202.5	907.2	73.5	242.5	212.5	918
KLX40-Ⅱ	30KW	3"	2.5"	315	105	580	655	301		580	318	73.5	254.5	213.5	965	61.5	243.2	202.5	953.2	73.5	253.5	212.5	964

注意：以上数据图相关尺寸不作为实物最终依据，东正保留对于数据更新权限不再另行通知。

Note: The relevant dimensions of the above data diagrams are not regarded as the final basis of the actual object. DONJOY reserves the right to update the data without further notice.

DJ-KLX 系列离心泵数据图(不带外罩)

DJ-KLX series centrifugal pump data chart (without cover)

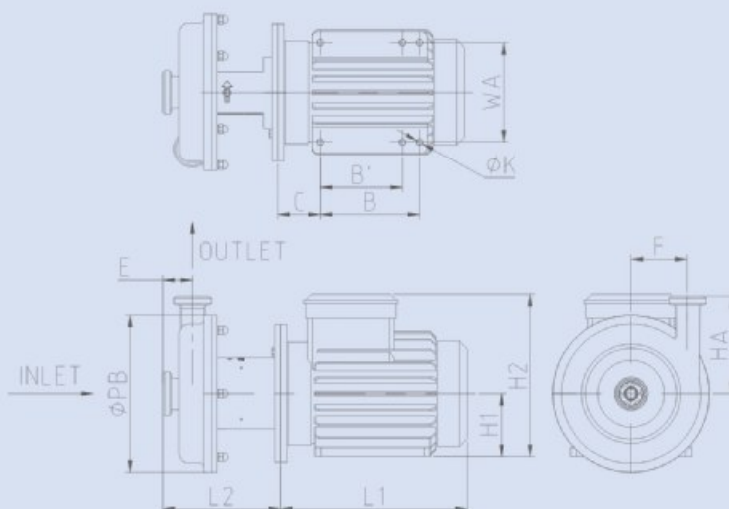

KLX 系列 Series	外形安装尺寸 Assembly Dimension													进/出口连接方式 Inlet / outlet connection								
	功率 Power (KW)	进口 Inlet d'/DN	出口 Outlet d''/DN	ΦPB	F	L1	A	B	B'	C	K	H1	H2	SMS螺纹连接 Thread connection			INCH卡箍连接 Clamp connection			DIN螺纹连接 Thread connection		
														E	L2	HA	E	L2	HA	E	L2	HA
KLX10	1.1KW	1.5"	1.5"	189	63	269	125	100	/	50	10	80	192	56	196	136	49	188.7	129	56	196	136
	1.5KW	1.5"	1.5"	189	63	285	140	100	/	56	10	90	217	56	196	136	49	188.7	129	56	196	136
	2.2KW	1.5"	1.5"	189	63	301	140	125	/	56	10	90	217	56	196	136	49	188.7	129	56	196	136
KLX15	1.5KW	2"	1.5"	250	90.5	285	140	100	/	56	10	90	217	48	193	155	41	185.7	148	49	193	155
	2.2KW	2"	1.5"	250	90.5	301	140	125	/	56	10	90	217	48	193	155	41	185.7	148	49	193	155
	3KW	2"	1.5"	250	90.5	316	160	140	/	63	12	100	240	48	193	155	41	185.7	148	49	193	155
KLX20- I KLX20- II	2.2KW	2"	2"	250	85	301	140	125	/	56	10	90	217	45	207	170	38	200	163	46	208	171
	3KW	2"	2"	250	85	316	160	140	/	63	12	100	240	45	207	170	38	200	163	46	208	171
	4KW	2"	2"	250	85	351	190	140	/	70	12	112	252	45	207	170	38	200	163	46	208	171
	5.5~7.5KW	2"/2.5"	2"	250	85	399	216	140	/	89	12	132	301	45	207	170	38	200	163	46	208	171
KLX25 KLX30	4KW	3"	1.5"	328	127.5	351	190	140	/	70	12	112	252	60	201.5	194	49	190.2	183	59	201	193
	5.5~7.5KW	3"	1.5"	328	127.5	399	216	140	/	89	12	132	301	60	201.5	194	49	190.2	183	59	201	193
KLX35- I KLX35- II	11~15KW	3"	1.5"	363	131	477	254	254	210	108	14.5	160	413	76	282	194	65	270.7	222	75	281	229
	15KW	3"	2"	363	131	477	254	254	210	108	14.5	160	413	76	282	229	65	270.7	222	75	281	66
	18.5KW	3"	2"	363	131	477	254	254	210	108	14.5	160	413	76	282	229	65	270.7	222	75	281	66
KLX40- I KLX40- II	11~15KW	3"	2.5"	315	105	477	254	254	210	108	14.5	160	413	73.5	292	213.5	61.2	280.7	202	73.5	291	213
	18.5KW	3"	2.5"	315	105	477	254	254	210	108	14.5	160	413	73.5	292	213.5	61.2	280.7	202	73.5	291	213
	22KW	3"	2.5"	315	105	573	279	279	241	121	14.5	180	434	73.5	292	213.5	61.2	280.7	202	73.5	291	213
	30KW	3"	2.5"	315	105	618	318	305	267	133	18.5	200	473	73.5	292	213.5	61.2	280.7	202	73.5	291	213


注意：以上数据图相关尺寸不作为实物最终依据，东正保留对于数据更新权限不再另行通知。

Note: The relevant dimensions of the above data diagrams are not regarded as the final basis of the actual object. DONJOY reserves the right to update the data without further notice.

DJ-KLX 系列离心泵曲线图

DJ-KLX series centrifugal pump graph

KLX系列-离心泵-综合曲线图
KLX series-centrifugal pump-graph

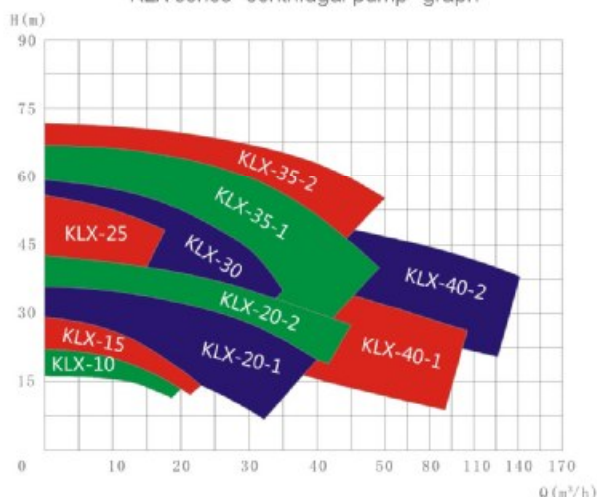


测试条件: 介质清水, 温度20°C, 叶轮转速2900 R.P.M


(此曲线图亦适用电机60Hz, 叶轮转速3600R.P.M) Q-流量(m³/h), H-扬程(M), P-功率(KW), η %-泵效率。

Testing condition: medium water, temperature 20°C, impeller speed 2900 RPM (This graph also applies to motor 60HZ, impeller speed 3600RPM)
Q-Flow rate (m³/h), H-head (meter), P-power(KW), η % pump efficiency


KLX-10(Q-H曲线图/Graph)

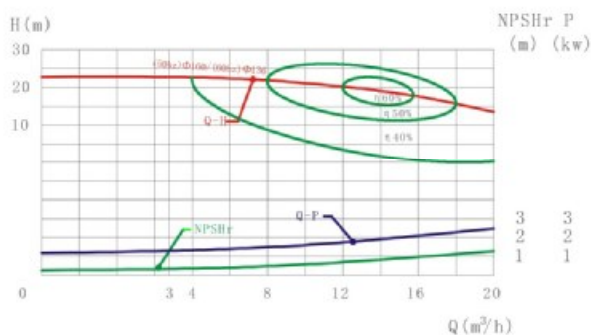


KLX-15(Q-H曲线图/Graph)

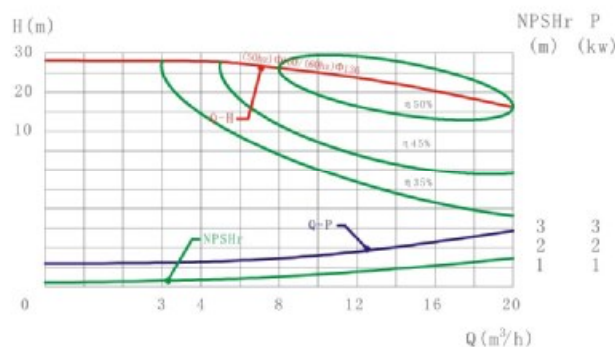


KLX-20-1(Q-H曲线图/Graph)

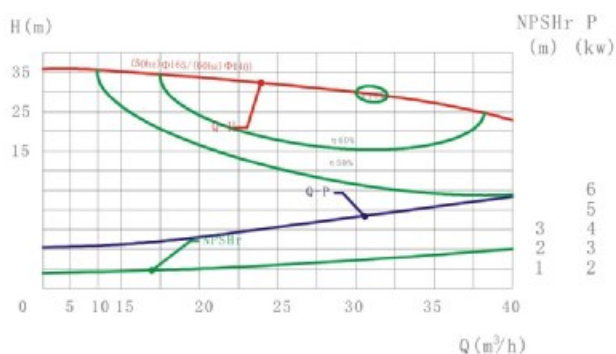


KLX-20-2(Q-H曲线图/Graph)

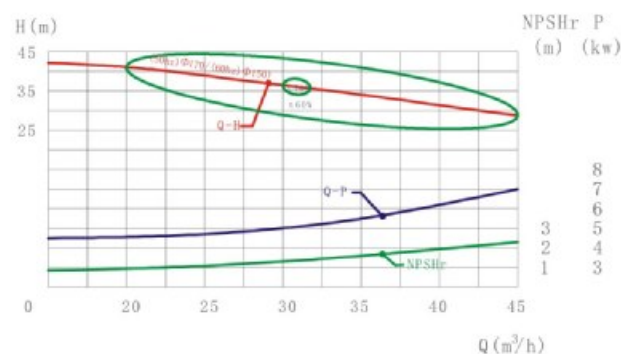


KLX-25(Q-H曲线图/Graph)

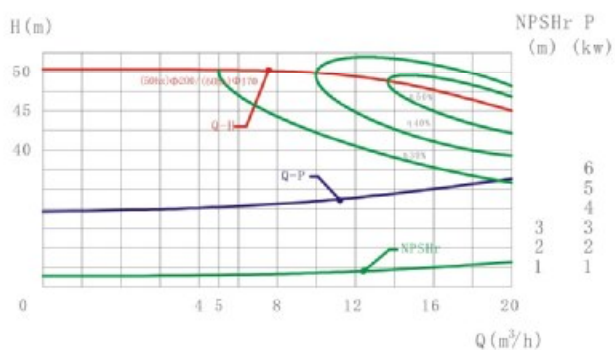


KLX-30(Q-H曲线图/Graph)

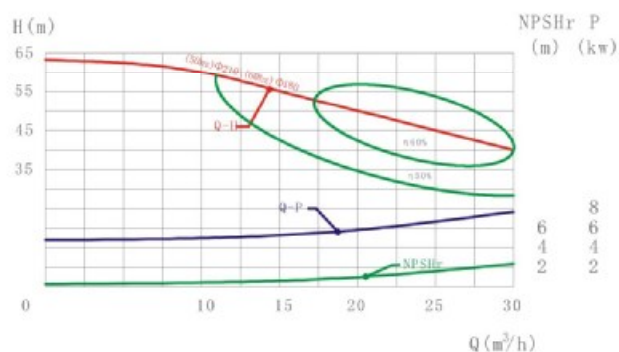


KLX-35-1(Q-H曲线图/Graph)

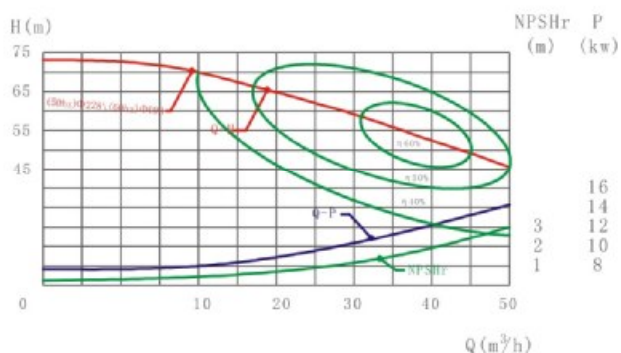

KLX-35-2(Q-H曲线图/Graph)

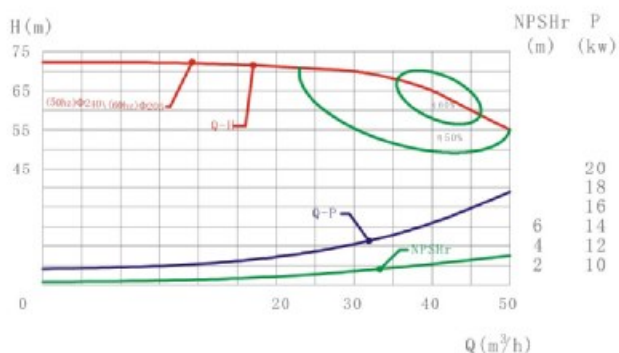

KLX-40-1(Q-H曲线图/Graph)

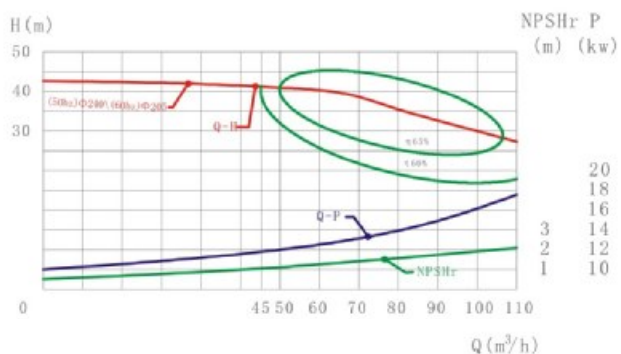

KLX-40-2(Q-H曲线图/Graph)

